

# Technical Data Sheet



## SolVin 382NG Polyvinyl chloride

### TYPE

Polyvinyl chloride made by microsuspension polymerisation for plastisol preparation.


### MAIN APPLICATION

**Spread coating :**  
- flooring top coat.

### ADVANTAGES

- High filler acceptance.
- Matt appearance in flooring to coat.
- Good viscosity stability on storage.

### VISCOSITY CURVES

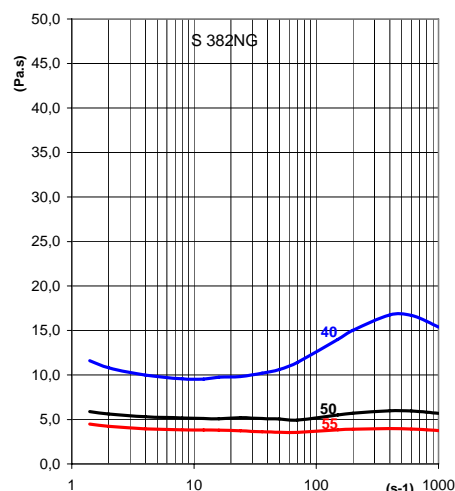

Paste preparations with 40, 50 and 55 phr DINP. Readings were made 1 h after preparation at 23 °C with rotating and capillary viscosimeters.

| CHARACTERISTICS                                  | UNITS | VALUES | TEST METHODS |
|--|-------|--------|--------------|
| K value  |       | 82     | ISO 1628-2   |
| Sieve analysis :<br>- retained on 0.125 mm sieve | g/kg  | ≤ 0.2  | ISO 787-18   |
| Volatile content                                 | %     | ≤ 0.3  | ISO 1269     |

*The data and numerical results contained in this document are provided for the sake of general information and are given in good faith. **The numerical data and tables of results show typical average data measured on the products. They cannot be considered as specifications.** The information presented here cannot be considered as a suggestion to use our products without taking into account existing patents, or legal provisions or regulations, whether national or local.*

*Only the version published on the official Website of SOLVIN S.A. will be considered as genuine.*

*Before storing, handling and using SolVin PVC we ask you to carefully follow the instructions mentioned in the safety data sheet, available on request from our technical service team.*



Version of May 2010

©Registered trade-mark

a Passion for Progress®